


NO.	Rev.	Revision Record	Date
⊖	A0	首次发行	2018-03-14


### Frontview



### Sideview

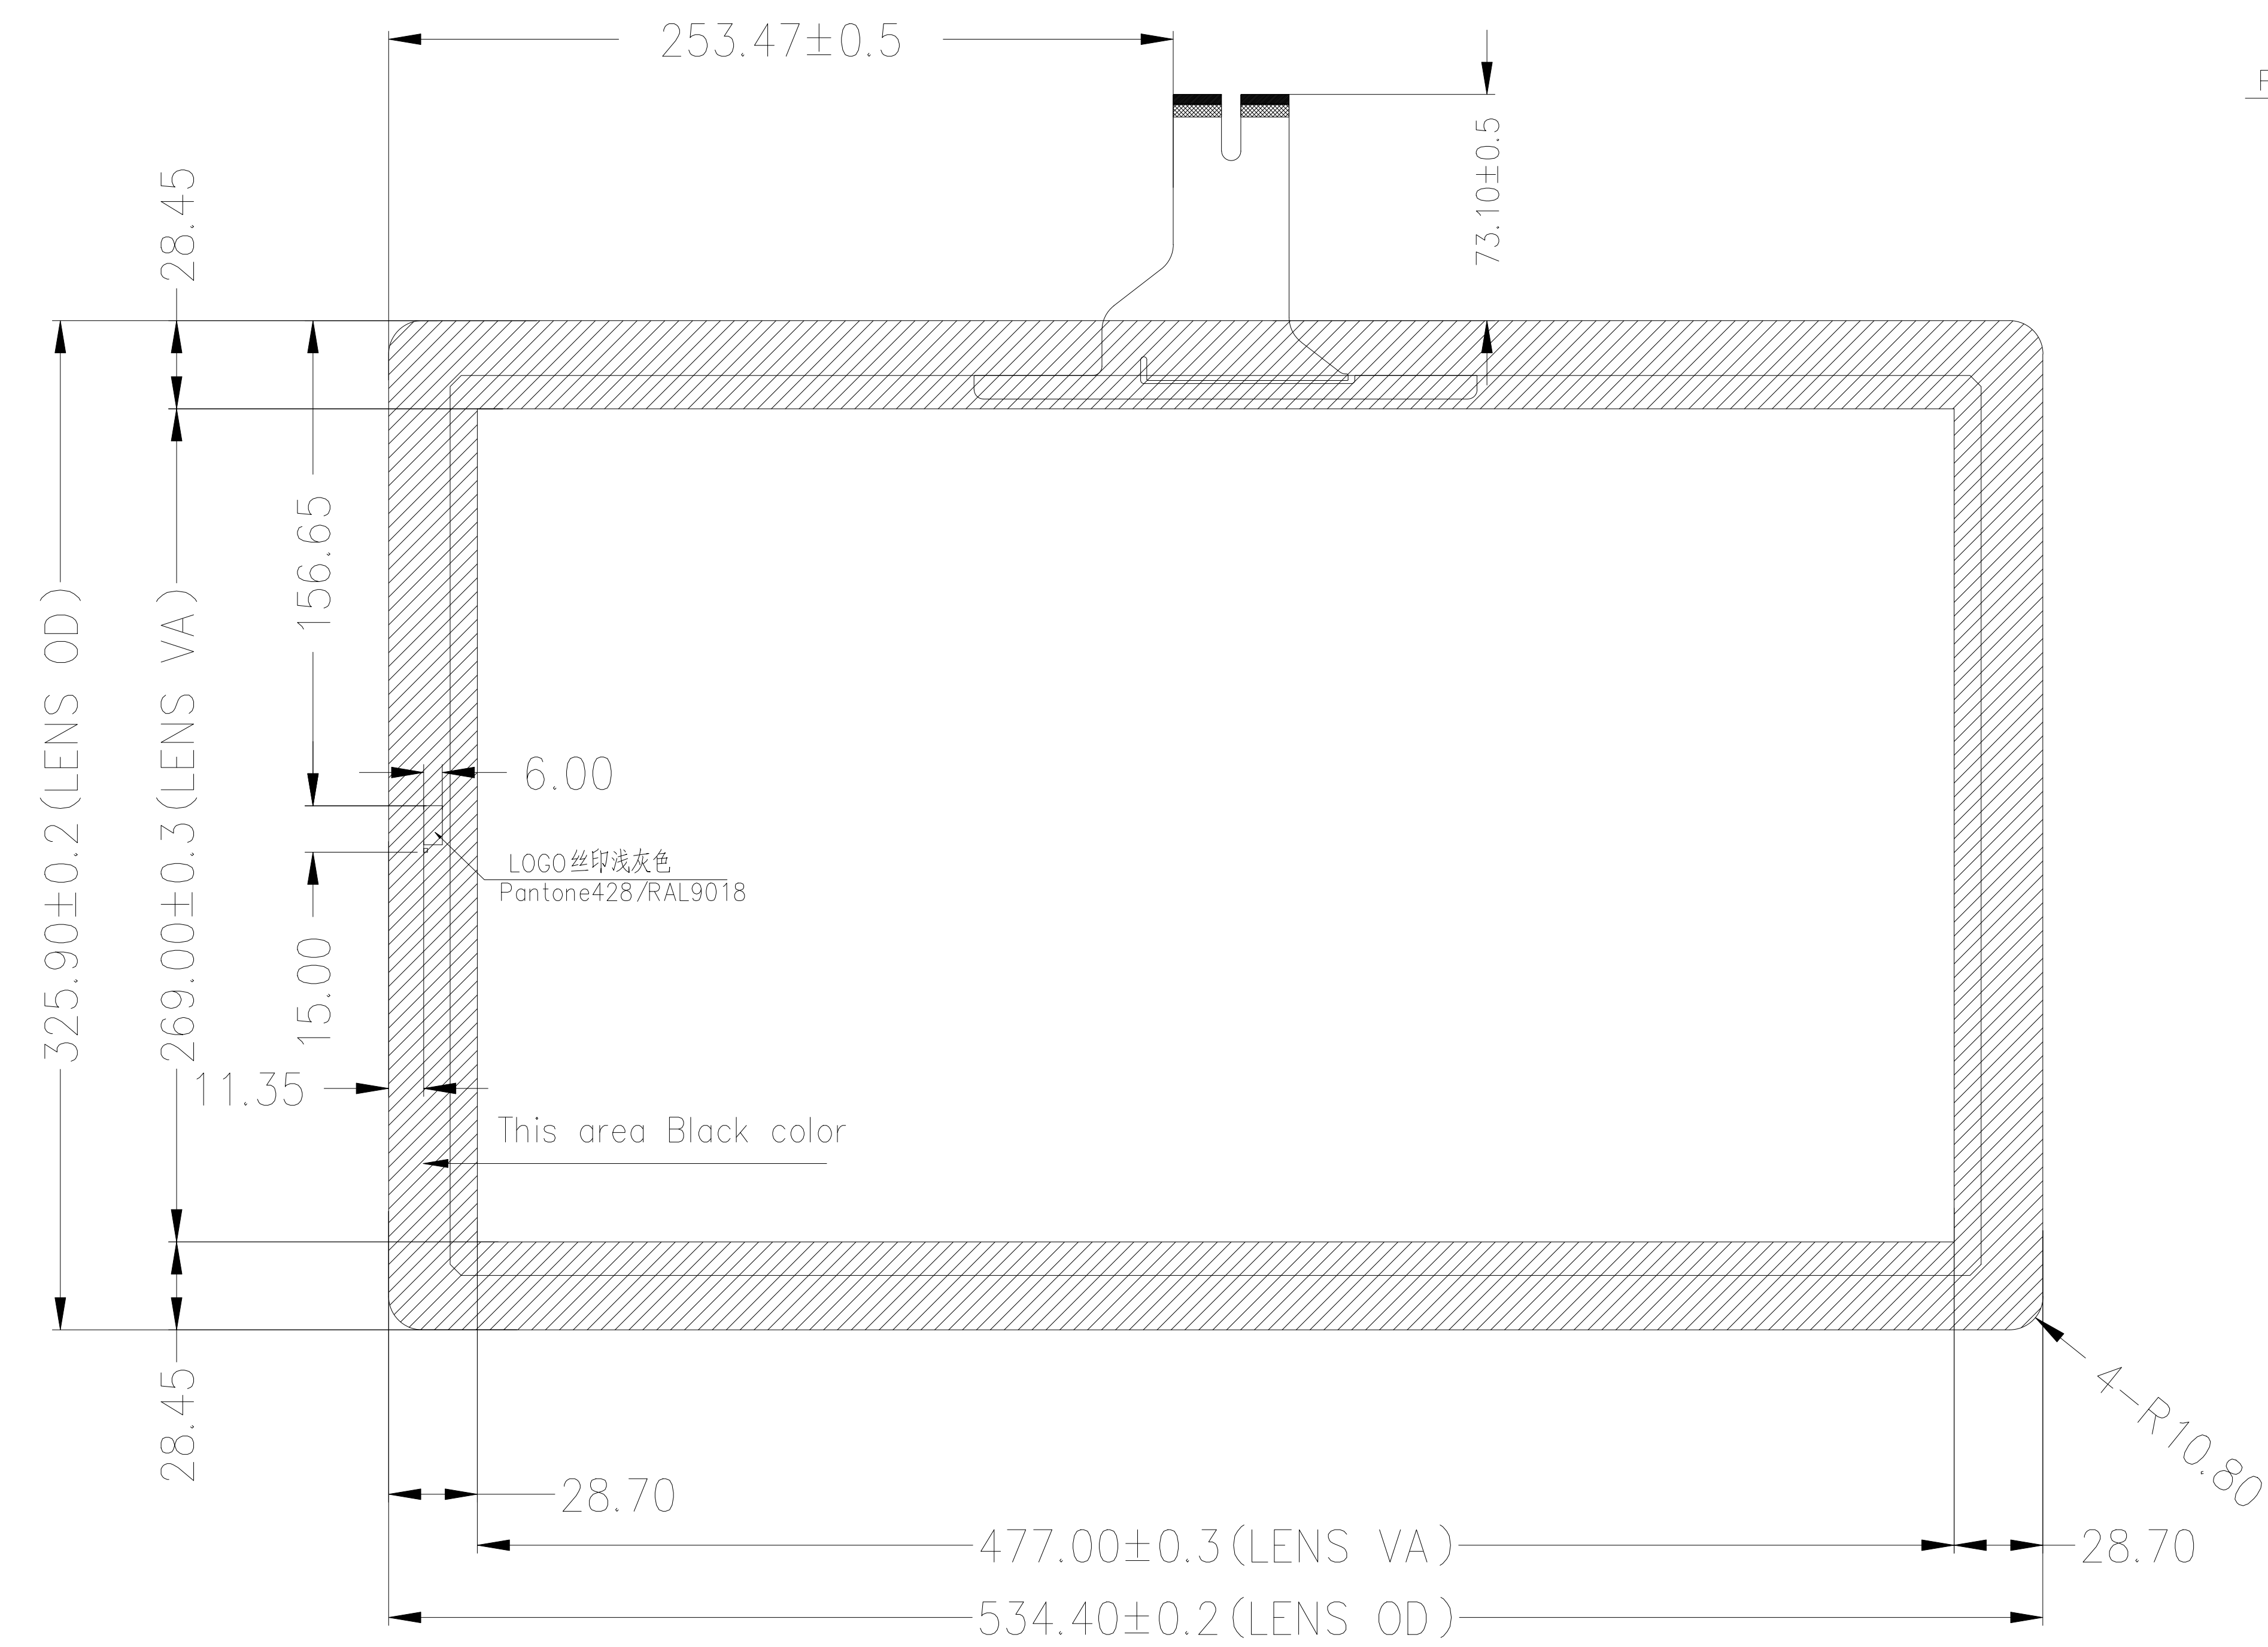


### Backview

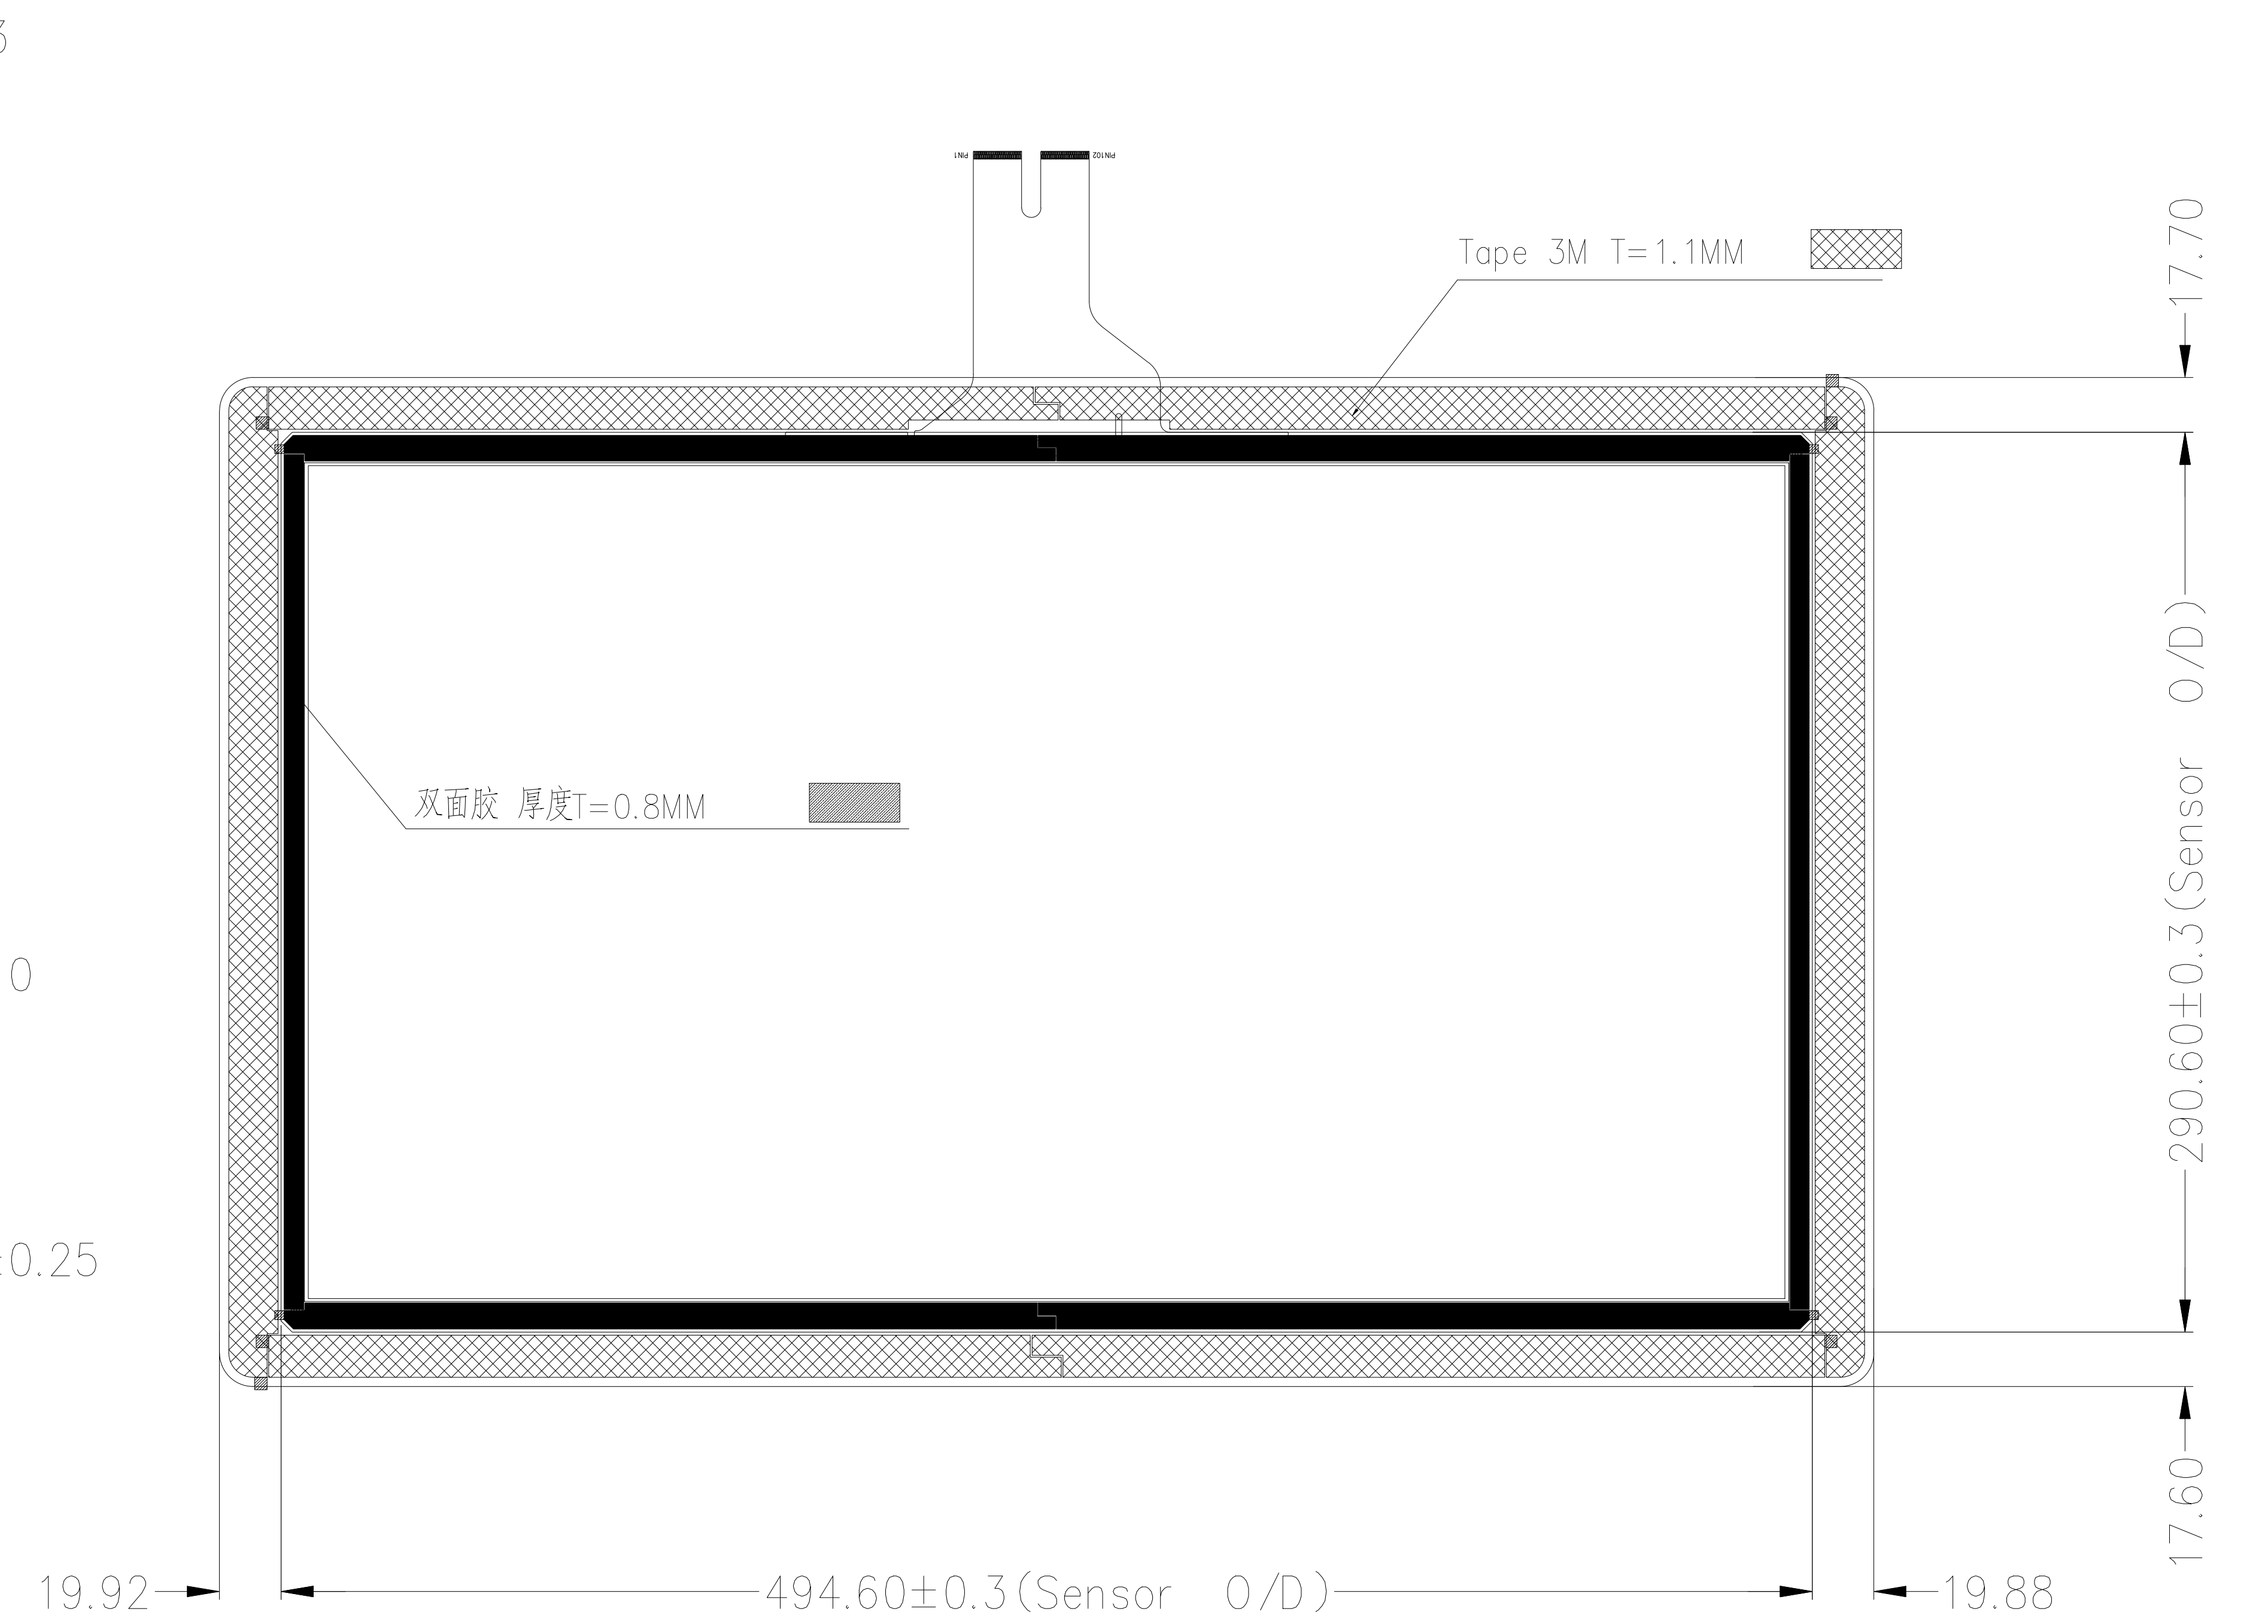

#### Remarks :

- COVER LENS is tempered glass(G+G);
- FPC is PIN port,controller is USB;  
four PIN seat-USB interface??
- PCB controller board IC??ILI2510 ;
- connecting PIN是0.3\*102 ,
- surface hardness6H;
- transparence=86%+;
- unmarked±0.3mm;
- RoHS standard.
- storage : -30℃~+80℃, ≤85%RH
- working : -20℃~+30℃, ≤85%RH

5V  
D-  
D+  
GNDIN  
GND

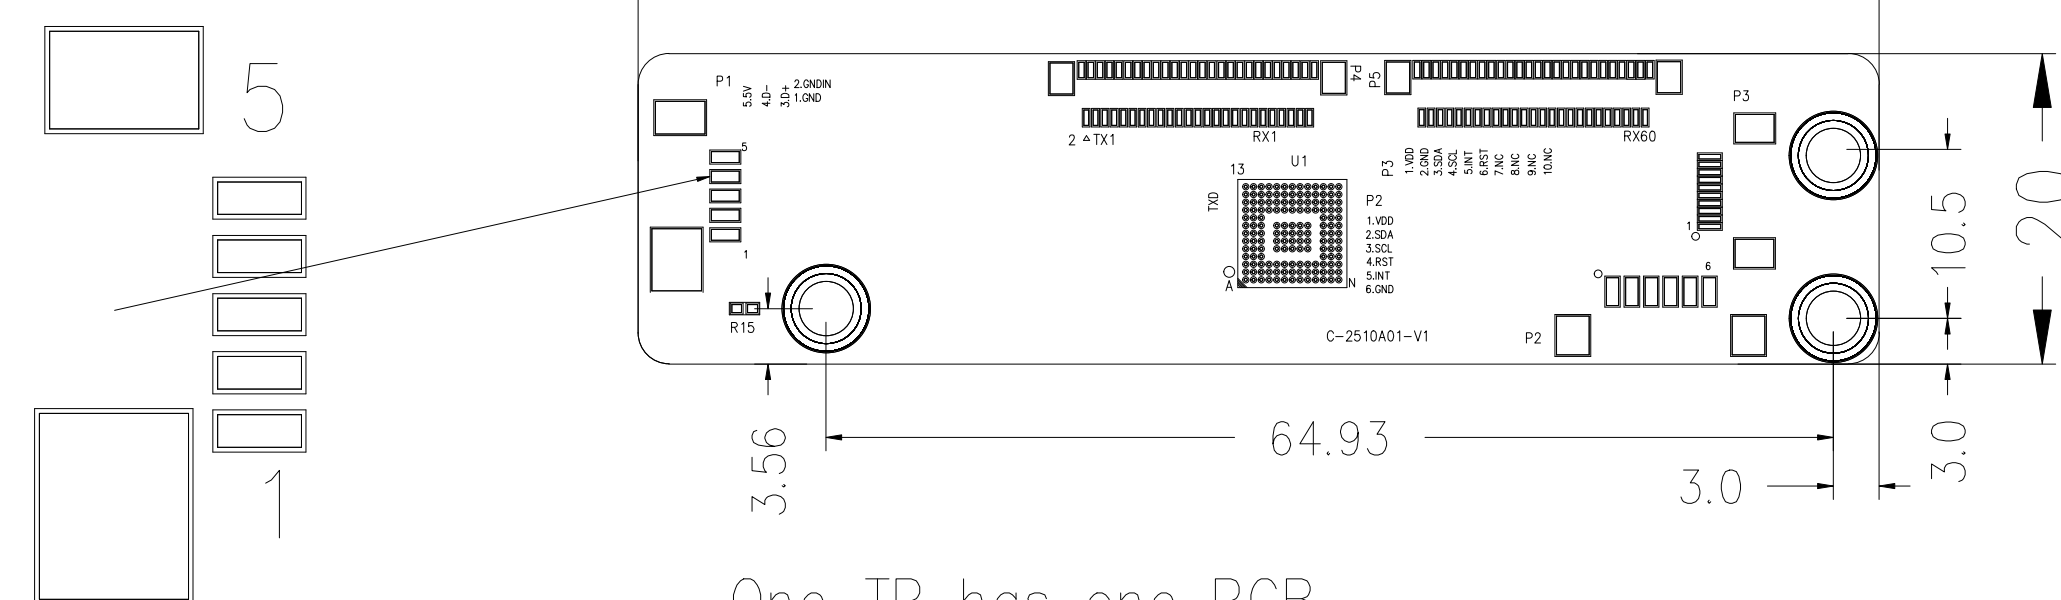

#### USB

PIN	定义
1	GND
2	GNDIN
3	D+
4	D-
5	VDD/5V

#### TP 结构图

DOPO TECH GROUP LIMITED

Sheet	1 of 1	Model NO.	DP-GG215244A-V1		
UNIT	mm	CUSTOMER P/N	21.5寸		
Rev.	A0	Designed	LLL	Date	2018-03-14
Scale	FIT	Checked	PLX	Date	2018-03-14
		Approved		Date	